



# PRODUCT DATASHEET

## Confidex Carrier HF™



### Tag dimensions

25 x 25 x 0,2 mm / 0.98 x 0.98 x 0.007 in

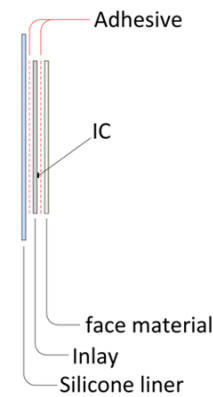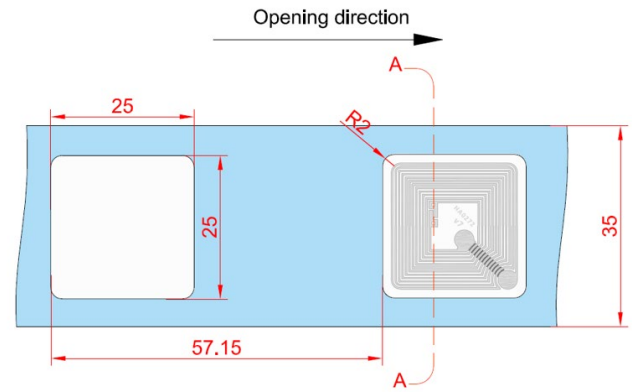

### ELECTRICAL SPECIFICATION

#### Device type

- NTAG213: NFC Forum Type 2
- SLIX2: NFC Forum Type 5

#### Air interface protocol

- NTAG213: ISO/IEC 14443A
- SLIX2: ISO/IEC 15693

#### Operational frequency

13,56 MHz

#### IC options and memory configurations

- NXP NTAG213
  - User memory 144 bytes
- NXP ICODE SLIX2
  - User memory 2528 bits

#### Read range\*

- NXP NTAG213
  - Mobile phone up to 4 cm
  - Fixed reader up to 7,5 cm
- NXP ICODE SLIX2
  - Mobile phone up to 5,5 cm
  - Fixed reader up to 53 cm

#### Applicable surface materials\*

Non-metallic surfaces

\* Read ranges are measured in laboratory environment and there can be some variation in real application. Also used surface material and IC type might affect the read range.

### MECHANICAL SPECIFICATION

#### Tag materials

Printable white PET, resin ribbon recommended.

#### Background adhesive

High performance acrylic adhesive optimized for low surface energy plastics.

#### Weight

< 1 g

#### Delivery format

1000 pcs / reel

#### Pitch on reel

57,15 mm / 2.25 in

#### Reel core inner diameter

76 mm / 3"

### ENVIRONMENTAL RESISTANCE

#### Operating temperature

-35°C to +85°C / -31°F to +185°F

#### Ambient temperature

-35°C to +90°C / -31°F to +194°F

#### Water resistance

Good, tested 5 hours in 1m deep water (IP68)

#### Chemical resistance

- No physical or performance changes in:
- 168h Salt water (salinity 10%) exposure
  - 168h Motor oil exposure
  - 168h Sulfuric acid (10%, pH 2) exposure
  - 24h NaOH (10%, pH 13) exposure
  - 20min acetone exposure

#### Storage condition

1 year in +20°C / 50% RH (shelf life for adhesive)

#### Expected lifetime

Years in normal operating conditions

*Values in the table are the best recommendations; resistance against environmental conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested. Contact Confidex for more specific information.*

## PERSONALIZATION OPTIONS

### Pre-encoding

- Customer-specific encoding

### Visual marking

- Variable printing of customer-specific content (such as QR-code, barcode, serial number)
- Color artwork, branding

## INSTALLATION INSTRUCTIONS

Ideal installation conditions are +20°C (+68°F) / 50% RH. For exceptional conditions, please contact Confidex. Bond strength can be improved with firm application pressure. Always ensure clean surface for obtaining the maximum bond strength.

During attachment to the identified item, please avoid touching the background adhesive. If the location on the asset needs to be changed, please use a new tag instead of re-placing the used one; the adhesion will suffer from the re-placement.

Minimum bending diameter of the Confidex Carrier HF™ is defined to be 50mm. Do not bend the label above the limit. Never touch on the location of the IC. IC is a sensitive electrical component and can be damaged if unexpected pressure is applied on it.

## PRINTER COMPTIBILITY

The Confidex Carrier HF™ labels are designed and verified to work with the SATO CL4NX HF printer.

For additional information and technical support, contact Confidex Ltd.

## ORDER INFORMATION

**Product number:** 3003232

**Product name:** Confidex Carrier HF™ NTAG213

**Product number:** 3003233

**Product name:** Confidex Carrier HF™ SLIX2

For additional information and technical support, contact Confidex Ltd.

### DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, CONFIDEX MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN CONFIDEX STANDARD CONDITIONS OF SALE, CONFIDEX AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Confidex products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Confidex products, materials, or services will be safe and suitable for use under end-use conditions. Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Confidex.