

Zebra **4Sight EV6** >>

Fanless industrial imaging computer

Overview

Machine vision for the factory floor

Zebra® 4Sight EV6 is an industrial computer built for machine vision on the factory floor. Part of a long and solid history, the Zebra 4Sight EV6 is an evolution of its immediate predecessor, integrating a seventh-generation quad-core Intel® Core™ processor for ever more demanding multi-camera applications.

A fanless design with multiple ports for GigE Vision® and USB3 Vision® cameras make the Zebra 4Sight EV6 right at home in any production facility, keeping an eye on a single line or many production lines. Zebra 4Sight EV6 vision controllers are supported by two comprehensive software platforms: Zebra Aurora Design Assistant (formerly Matrox Design Assistant), is a flowchart-based integrated development environment (IDE), whereas Zebra Aurora Imaging Library, (formerly Matrox Imaging Library), is a software development kit (SDK) for more traditional programmers. Each software offers tools for video capture, analysis, classification, location, measurement, reading, verification, communication, and I/O operations so that engineers and technicians can quickly configure and deploy machine vision applications to Zebra 4Sight EV6 vision controllers.

Multiple ports with power for cameras

Zebra 4Sight EV6 is equipped with four Gigabit Ethernet and four SuperSpeed USB ports for connecting to the full range of available GigE Vision and USB3 Vision cameras. The Gigabit Ethernet ports support PoE to further simplify cabling and thus reduce costs when opting for suitable GigE Vision cameras. Powered by a mobile-class embedded processor, Zebra 4Sight EV6 has what it takes to cost-effectively handle typical multi-camera inspections.

Factory and enterprise connectivity

Zebra 4Sight EV6 provides the necessary connectivity for interfacing to other industrial equipment and communicating with enterprise systems. RS-232/RS-485 ports support connections to legacy automation devices, while two additional Gigabit Ethernet ports provide independent connections to industrial and enterprise networks. These networking ports include a hardware-assisted mechanism for PROFINET® communication. This mechanism ensures timely response when the automation controller is set up for a short cycle-time or when the processor is too busy performing other tasks.

Industrial-strength design and longevity

The fanless design of the Zebra 4Sight EV6 reduces physical maintenance, eliminating the need to clean or replace an air filter or a worn-out fan. A small, rugged footprint casing and wide ambient operational temperature range allows the Zebra 4Sight EV6 to be mounted either horizontally or vertically in hostile, space-limited locations. Moreover, careful component selections secure the long-term availability of the Zebra 4Sight EV6.

Zebra 4Sight EV6 at a glance

Reduce service stoppages with a fanless design

Inspect multiple sites through the support for four GigE Vision and four USB3 Vision cameras

Simplify cabling for GigE Vision installations using Power-over-Ethernet (PoE)-enabled ports

Tackle typical vision workloads with a mobile-class embedded seventh-generation Intel Core processor

Connect separately to the factory floor and enterprise networks via two more Gigabit Ethernet ports

Synchronize with other equipment using the integrated real-time digital I/Os with rotary encoder support and RS-232/RS-485 ports

Streamline application development using the [Aurora Design Assistant](#) flowchart-based IDE or the [Aurora Imaging Library](#) SDK

Tackle machine vision applications with utmost confidence using field-proven tools for analyzing, locating, classifying, measuring, reading, and verifying

Leverage machine learning including deep learning to categorize image content

Real-time discrete I/Os

Discrete I/O management is achieved through a dedicated hardware-assisted mechanism on the Zebra 4Sight EV6. The mechanism enables output events to occur at precise moments in time, based on elapsed time, or for specific input events. An input event can come directly from a discrete input—including from a rotary encoder—or be count-derived from a discrete input. Programmed output events are stored in a hardware list, which is traversed based on a clock or an input event. The carrying out of an output event results in a state transition, pulse, or pulse train on a specific discrete output. Multiple cascable hardware timers are available to count or generate specific events. The Zebra 4Sight EV6 has what it takes to effectively synchronize a typical vision application with a manufacturing line.

Software Environment

Microsoft Windows 10 IoT Enterprise

Zebra 4Sight EV6 comes pre-installed with Microsoft® Windows® 10 IoT Enterprise 2019 (64-bit), which provides the familiarity, performance, and reliability of Windows 10—including the Unified Write Filter (UWF) to prevent corruptions caused by unanticipated power-downs—and multi-language support.


Field-proven application development software

Zebra 4Sight EV6 is supported by Aurora Imaging Library¹ software—a comprehensive SDK with a 25-year history of reliable performance. This toolkit features interactive software and programming functions for image capture, processing, analysis,

annotation, display, and archiving operations, with the accuracy and robustness needed to tackle the most demanding machine vision applications. Refer to the Aurora Imaging Library datasheet for more information.


Zebra 4Sight EV6 is also available with, and licensed for, Aurora Design Assistant¹ software, a versatile and extendable IDE. Vision applications are created by constructing an intuitive flowchart instead of writing traditional programming code. A custom, web-based operator interface to the application is created through an integrated HTML visual editor. Refer to the Aurora Design Assistant datasheet for more information.

Connectivity

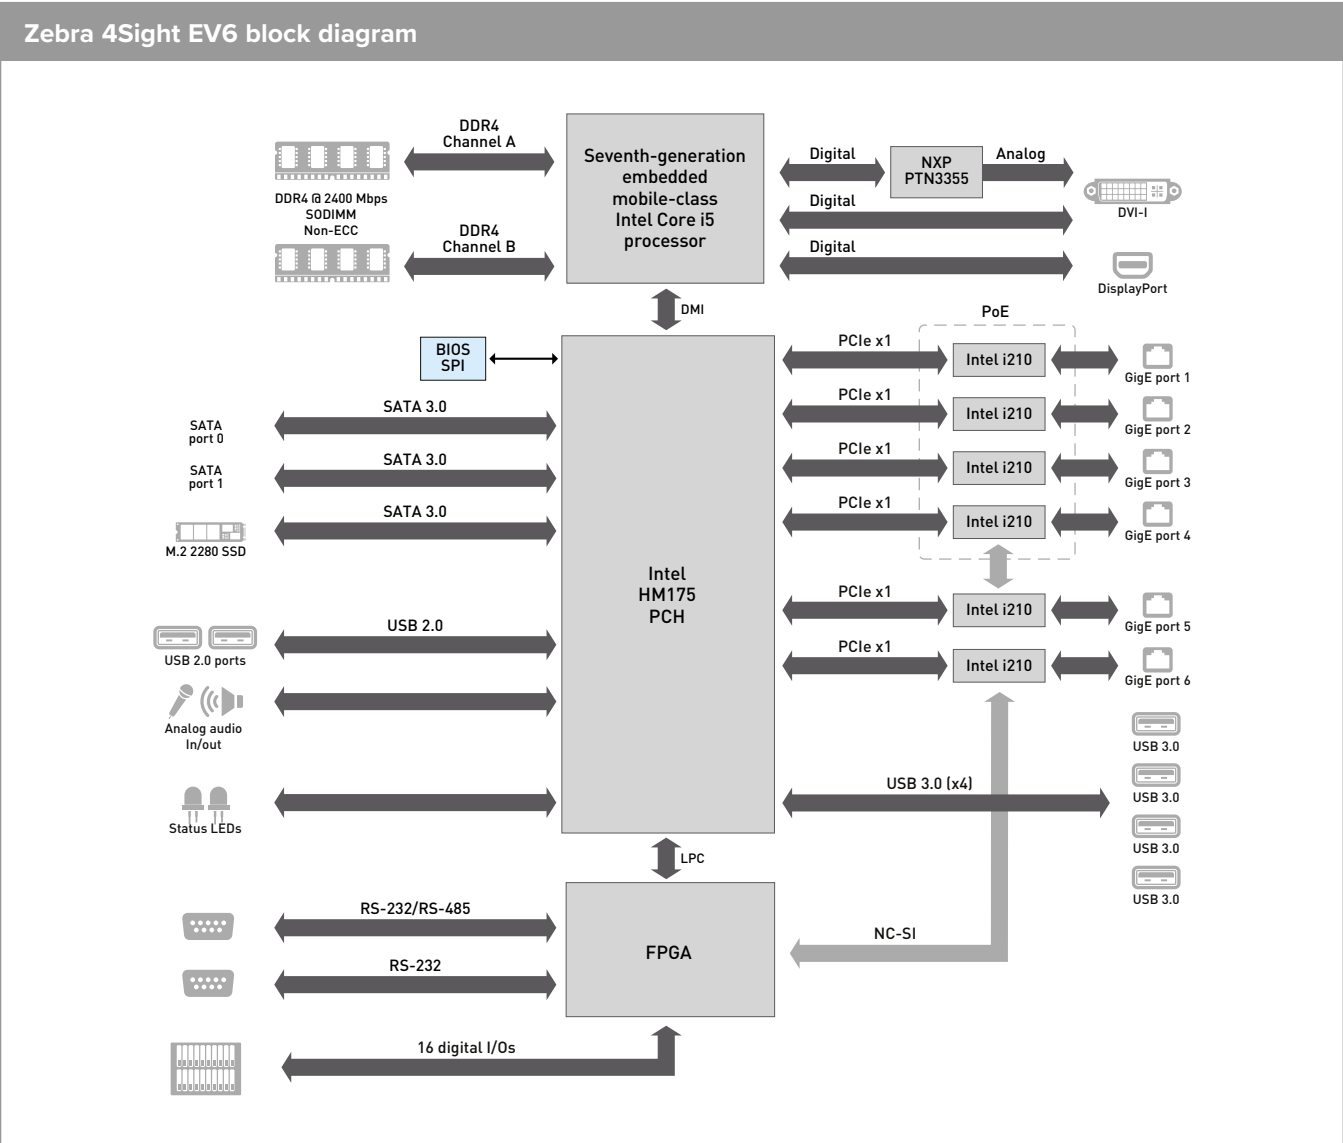


Connectivity (cont.)

Zebra 4Sight EV6 front and back views

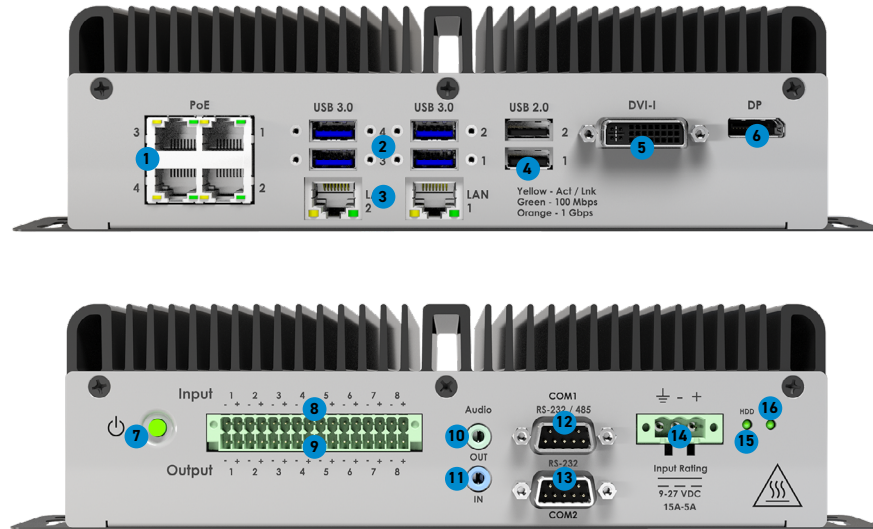

- | | | | | |
|------------------------------------|------------------|--------------------|-----------------------|-----------------|
| 1. Gigabit Ethernet ports with PoE | 4. USB 2.0 ports | 7. Power button | 11.Audio in | 14.Power input |
| 2. USB 3.0 ports | 5. DVI-I output | 8. Digital inputs | 12.RS-232/RS-485 port | 15.HDD LED |
| 3. Gigabit Ethernet ports | 6. DisplayPort | 9. Digital outputs | 13.RS-232 port | 16.Power-on LED |
| | | 10.Audio out | | |

Connectivity (cont.)

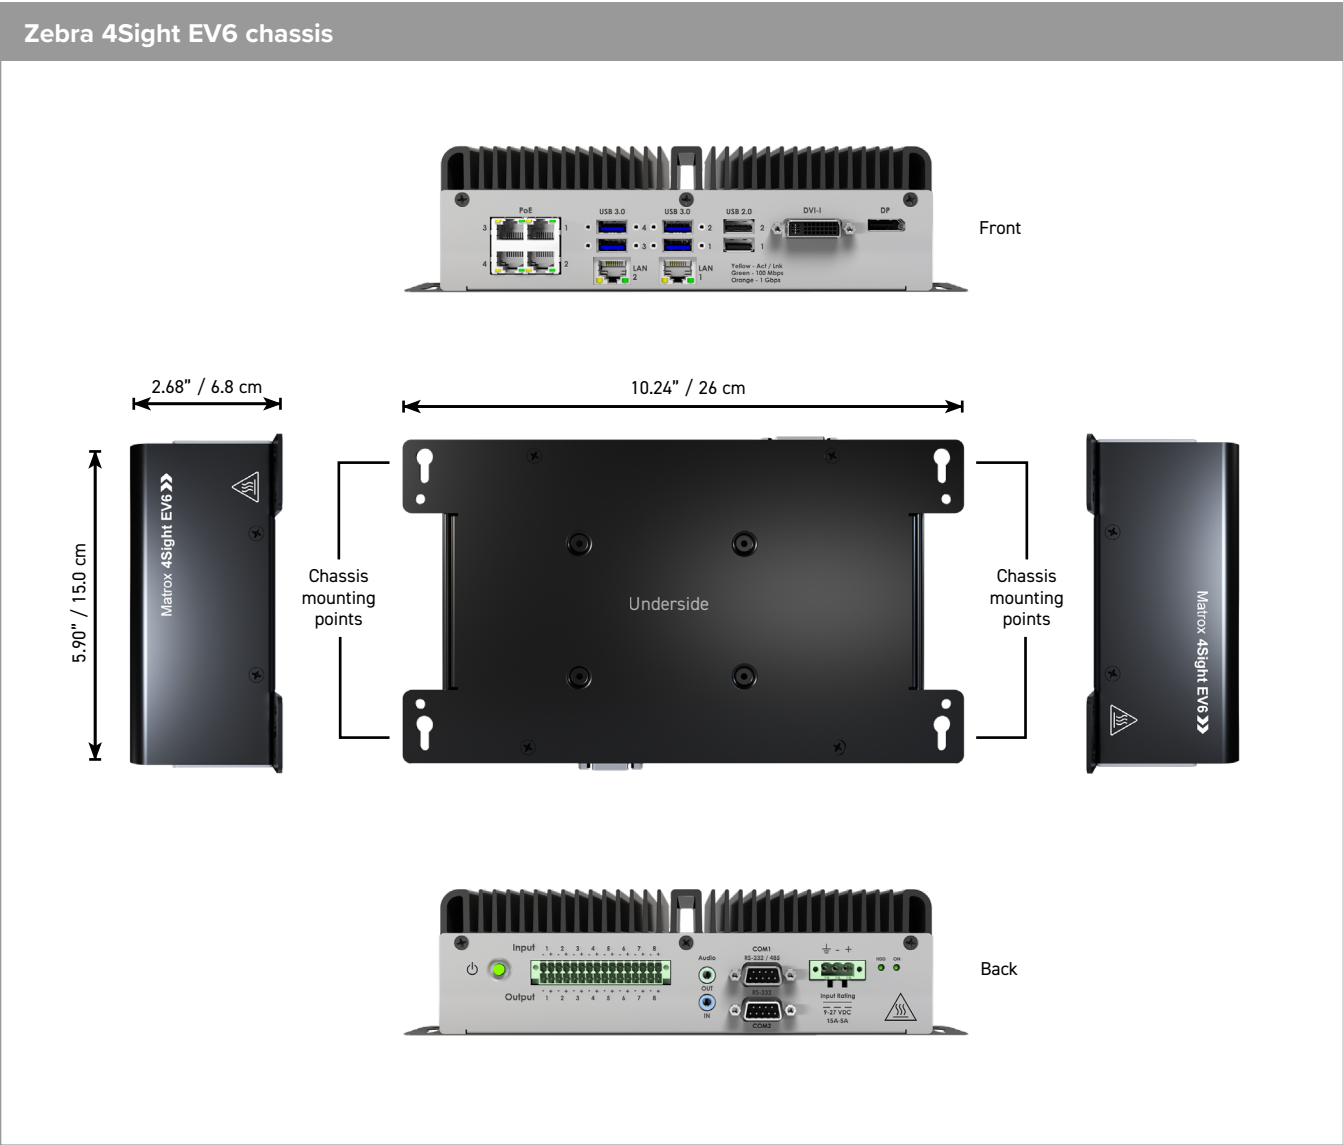

Specifications

Zebra 4Sight EV6	
System	
Intel Core i5-7442EQ	
Intel HM175 Platform Controller Hub (PCH)	
Two (2) 260-pin DDR4-2133/2400 SODIMM slots	
Dual-head graphics support	
One (1) DisplayPort output	
Up to 4096x2304 @ 60 Hz	
One (1) DVI-I display output	
Up to 1920x1200 @ 60 Hz digital	
Up to 2048x1536 @ 75 Hz analog	
Six (6) Gigabit Ethernet ports (10/100/1,000)	
Four (4) Gigabit Ethernet ports with PoE (up to 15.4 W per port)	
Two (2) standard Gigabit Ethernet ports	
Four (4) USB 3.0 ports	
Two (2) USB 2.0 ports	
Two (2) SATA 3.0 ports (internal)	
One (1) M.2 connector (used by supplied 64 GB M.2 2280 SSD)	
One (1) 24-bit stereo audio input and 24-bit stereo output	
One (1) RS-232 port	
One (1) RS-232/RS-485 port	
Sixteen (16) digital I/Os	
Eight (8) inputs	
Up to 24 V	
Eight (8) outputs (open collector)	
100 mA maximum @ 24 VDC	
64 GB M.2 2280 SATA 3.0 SSD	
Power input: 9–27 VDC (nominal 24 VDC @ 4.2 A)	
Chassis	
Dimensions (L x W x H): 22.5 x 15.0 x 6.8 cm (8.86 x 5.90 x 2.68 in)	
Four (4) mounting slots	
Fanless enclosure	
Power switch	
Power and HDD notification LEDs	
Mounting	
Horizontal or vertical mounting	
Certifications	
FCC Class A	
ICES-003 Class A	
CE Class A	
RCM Class A	
KC Class A	
CSA 61010-1-12	

Specifications (cont.)

Zebra 4Sight EV6	
Environmental	
Operating temperature: 0°C to 50°C (32°F to 122°F)	
Storage temperature: -40°C to 85°C (-40°F to 185°F)	
Relative humidity: Up to 90% (non-condensing)	
Software	
Pre-loaded with Microsoft Windows 10 IoT Enterprise 2019 (64-bit)	
Pre-loaded with Aurora Imaging Library and Aurora Design Assistant run-time environments	
Optionally pre-loaded with Aurora Design Assistant development and run-time environments	

Ordering Information

Part number	Description
Hardware	
EV615M16	Zebra 4Sight EV6 integrated unit with Intel Core i5-7442EQ, 16 GB DDR4 RAM, 64 GB M.2 MLC SSD, and Microsoft Windows 10 IoT Enterprise 2019 (64-bit). Pre-loaded with Aurora Imaging Library and Aurora Design Assistant run-time environments. Partially licensed for Aurora Design Assistant and Aurora Imaging Library. Note: The use of this product is governed by Microsoft Software License Terms , among others.
EV615M16DA	Zebra 4Sight EV6 integrated unit with Intel Core i5-7442EQ, 16 GB DDR4 RAM, 64 GB M.2 MLC SSD, and Microsoft Windows 10 IoT Enterprise 2019 (64-bit). Pre-loaded with Aurora Design Assistant design-time and run-time environments. Partially licensed for Aurora Design Assistant and Aurora Imaging Library. Note: The use of this product is governed by Microsoft Software License Terms , among others.
EV615M16DA+	Zebra 4Sight EV6 integrated unit with Intel Core i5-7442EQ, 16 GB DDR4 RAM, 64 GB M.2 MLC SSD, and Microsoft Windows 10 IoT Enterprise 2019 (64-bit). Pre-loaded with Aurora Design Assistant design-time and run-time environments. Fully licensed for Aurora Design Assistant and Aurora Imaging Library. Note: The use of this product is governed by Microsoft Software License Terms , among others.
EV6PS*	150 W AC/DC power adapter (100–240 VAC input/24 VDC output) for Zebra 4Sight EV6.
Software	
Included with EV615M16	Licensed for the Aurora Design Assistant / Aurora Imaging Library Interface, Distributed Aurora Imaging Library and Industrial and Robot Communications run-time packages. See Aurora Design Assistant and Aurora Imaging Library datasheets for more information.
Included with EV615M16DA and EV615M16DA+	Separate installation media with the Aurora Design Assistant IDE and on-line documentation as well as a Aurora Design Assistant Maintenance registration number. Pre-loaded with the Aurora Design Assistant design-time and run-time environment. Allow the Aurora Design Assistant IDE to run when it is connected to them. EV615M16DA is licensed for the Aurora Design Assistant / Aurora Imaging Library Machine Vision, Identification, Image Compression, Interface, Distributed Aurora Imaging Library, Metrology, Color Analysis, and Industrial and Robot Communications run-time packages. The String Reader and SureDotOCR®, Geometric Model Finder, Registration, 3D Calibration and Supplemental and Classification packages need to be licensed separately. See Aurora Design Assistant and Aurora Imaging Library datasheets for more information. EV615M16DA+ is licensed for all Aurora Design Assistant and Aurora Imaging Library run-time packages.

Endnotes:

1. The software may be protected by one or more patents; see [Patents](#) for more information.



NA and Corporate Headquarters
+1 800 423 0442
inquiry4@zebra.com

Asia-Pacific Headquarters
+65 6858 0722
contact.apac@zebra.com

EMEA Headquarters
zebra.com/locations
contact.emea@zebra.com

Latin America Headquarters
zebra.com/locations
la.contactme@zebra.com