



THE WORLD'S LEADING MANUFACTURER OF LABEL DISPENSERS,  
REWINDERS, UNWINDERS, SLITTERS & COUNTING SOLUTIONS





MC-10 & MC10+

[labelmate.com](http://labelmate.com)

# MINI-CAT Rewinders

The MINI-CAT rewinders are the world's most popular entry-level label rewinders to be used in combination with small desktop or mid-range barcode printers. With a specially designed bi-directional motor, they offer trouble-free performance at an incredible low cost.

- ✓ Small footprint to fit on any desk
- ✓ Easy setup: attach the labels to the take-up core and ready to start
- ✓ Speed up to 50cm/sec to work with desktop or mid-range barcode printers
- ✓ Bi-Directional
- ✓ Large capacity for roll diameters up to 220mm
- ✓ Adjust the rewind force with a built-in potentiometer

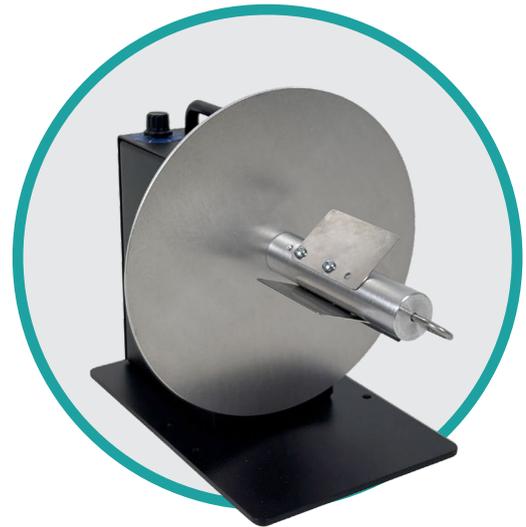

1-INCH

## FEATURES

- Maximum Label Roll Weight: 4 KG
- Maximum Roll Diameter: 220 mm
- Maximum Speed: 50 CM/SEC at the beginning of a 76 mm core roll
- An external command interface on the '+' models to support direct control start/stop by the barcode printer (check compatibility with your printer vendor). The MC+ can react to different types of signals provided by the printer. Selection of the signal nature is done via 2 jumpers on the internal PCB. Four modes selectable: Open Collector High Active, Open Collector Low, Logic Level High (MAX10VDC) & Logic Level Low (MAX10VDC). Factory setting is "Open Collector High", other settings on request.

## DIMENSIONS

- W x D x H: 220 x 305 x 195 mm
- Shipping Weight: 6 to 8 KG depending on model & selected options

## MINI-CAT-MODELS

P/N	MODEL	DESCRIPTION	MAX LABEL WIDTH
LMR001	MC-10	Standard for rewinding on cores 76mm. On request for core diameters 38/40/44/50/70/100 mm.	125 mm
LMR002	MC-10-1-INCH	Standard for rewinding on cores 25,4 mm	125 mm
LMR030	MC-10+	Including External Control. Standard for rewinding on cores 76mm. On request for core diameters 38/40/44/50/70/100 mm.	125 mm
LMR031	MC-10+-1-INCH	Including External Control. Standard for rewinding on cores 25,4 mm	125 mm

## MINI-CAT-OPTIONS


P/N	MODEL	DESCRIPTION
LMX587		Universal Alignment plate for MC
LMX441	APG-MC	Adjustable Paper Guide. Guides outer edge of label to ensure an even roll edge.
LMX440	EXT. FLANGE-MC-10	External Flange for MC-10 & MC-10+. Diam. 220 mm.
LMX442	STANDARD SHAFT MC	Standard shaft for MC with vanes, bail & internal flange
LMX443	ACH-MC	Adjustable Core Holder for rewinding on cores between 25 and 101 mm diameter. With inner flange.
LMX162	BAIL-MC	Standard on MC-10 & MC-10+. For rewinding on the shaft without using an empty core (coreless)

### GENERAL

- Power Supply: 15VDC 1600mA
- Limited Warranty of 2 Years, 1 Year on the Power Supply



Your local partner:

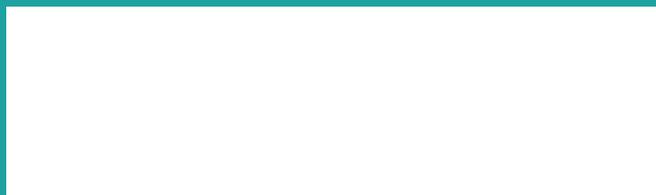

**+32 2 375 69 60**

**[brussels@labelmate.com](mailto:brussels@labelmate.com)**

Bergensesteenweg 78  
1651 Lot (Belgium)

**[www.labelmate.com](http://www.labelmate.com)**